


# PRODUCT DATA SHEET

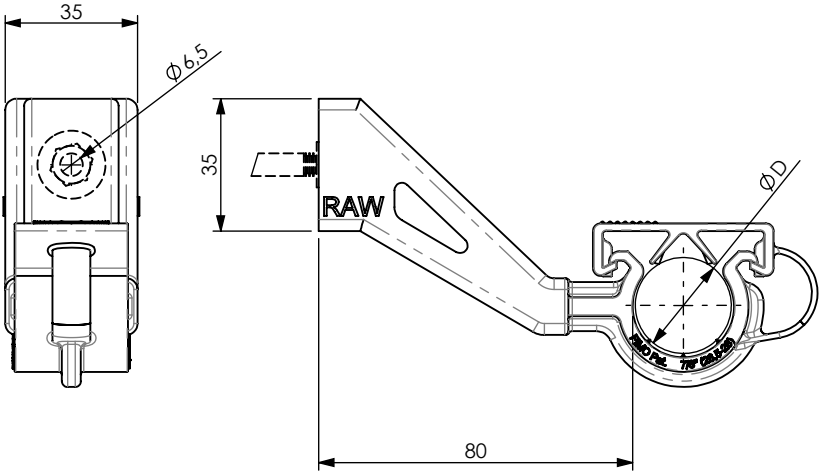

### A) SPECIFICATIONS

1 Cable clamp. Material: PA6-VO, black colour, self extinguishing, halogen free (according to UL94-VO).

### B) OPERATING TEMPERATURE


Working temperature : -40°C +125°C.  
Installation temperature : -20°C +60°C.

### C) DELIVERY MODALITIES

Packing in boxes. Label indicating: product code, article, quantity, production batch, FIMO logo and figure. ( Customer code on request ).

### D) MOUNTING INSTRUCTIONS

IT043

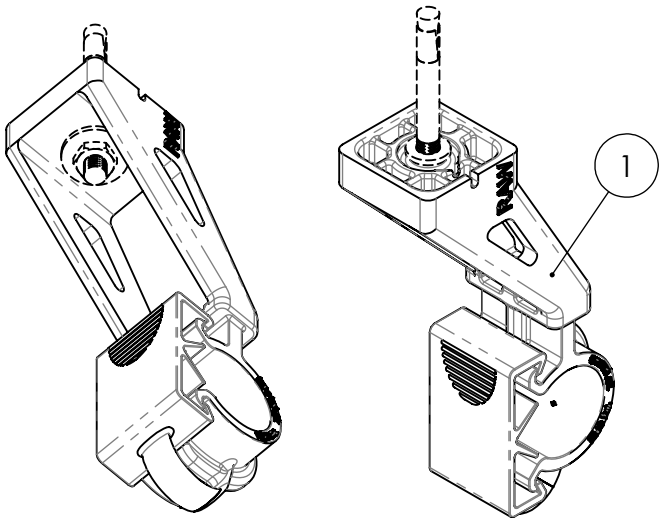

|         |                   |
|---------|-------------------|
| code    | <b>6150010078</b> |
| article | RAW 7/8"-80       |

|          |    |          |
|----------|----|----------|
| <b>D</b> |    |          |
| 26.5-28  | 50 | 0.0544kg |

| RI                                                                                  | DATE       | DR   | DATE                                                                                | AP   | <i>Description:</i><br><br><b>RAW 7/8"-80<br/>Radiating Cable Clamps</b>                   |
|-------------------------------------------------------------------------------------|------------|------|-------------------------------------------------------------------------------------|------|--------------------------------------------------------------------------------------------|
| 02                                                                                  |            |      |                                                                                     |      |                                                                                            |
|                                                                                     |            |      |                                                                                     |      |                                                                                            |
| 01                                                                                  |            |      |                                                                                     |      |                                                                                            |
| 00                                                                                  | 02/12/2016 | E.B. | 02/12/2016                                                                          | A.V. |                                                                                            |
| 1 <sup>ST</sup> EMISSION                                                            |            |      |                                                                                     |      |                                                                                            |
|  |            |      |  |      | <i>Use:</i> Horizontal or vertical installation of<br>radiating cables in tunnel           |
|                                                                                     |            |      |                                                                                     |      | <i>* Suitable for installation in high speed<br/>railway tunnel application (350 km/h)</i> |