


144F FIBRE DISTRIBUTION POINT

144F FDP

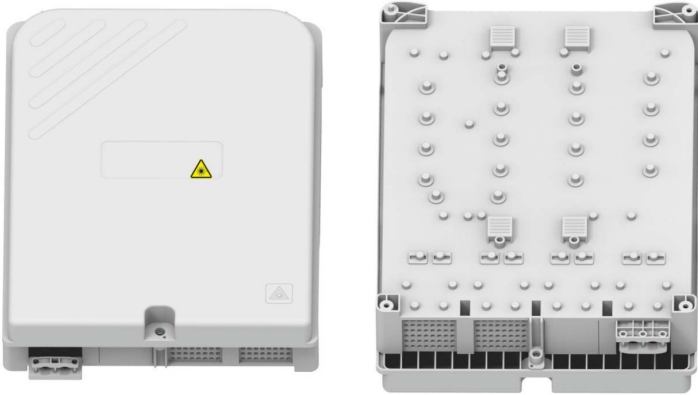

Engineered for both indoor and outdoor installations, this distribution point provides robust protection while maintaining flexibility across a wide range of network architectures. Its intelligently designed internal layout supports structured fibre routing, splitter integration and secure cable management, ensuring fast, consistent and professional installations.

With support for multiple splitter configurations and high splice capacity, the enclosure is ideal for both new-build deployments and retrofit projects, enabling efficient fibre distribution from feeder to drop cables.

SPLITTER CAPACITY

1:4 PLC Splitter	18 Pcs
1:8 PLC Splitter	18 Pcs
1:16 PLC Splitter	12 Pcs
1:32 PLC Splitter	4 Pcs

TECHNICAL SPECIFICATION

Splice Capacity (Splice Only)		576F
Capacity	SC-SX	72F
	LC-DX	144F
Mounted Method		Wall, Pole mounted
Cable Storage		Cable Storage Bracket for Feeder Cable and Drop Cable
Splice Method		Shrink Splice or Crimp Splice
Cable Loaded		Cable Mid-Span
Material		PC+ABS UL-94-V0
Colour		Light Grey
IP Rating		IP 55
Dimension(LxWxH)		512.70*388*126.50mm
Number of feeder cable entry		4 Port(7-18mm)
Number of drop cable entry		144 Port(3-5mm)

MECHANICAL DRAWING (UNIT:MM)

