


24F AERIAL FIBRE NODE



MECHANICAL DRAWING (MM)

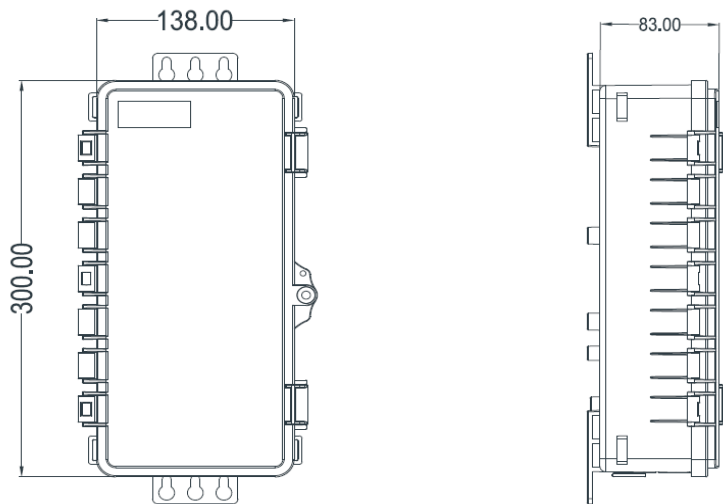

FEATURES & BENEFITS

- Supports cable mid-span
- Heavy duty strong plastic material
- Customer-specific builds available on request
- Compact size for capacity
- Using brand new materials to ensure product performance and quality

CABLE ENTRY/EXIT PARAMETERS

Number of feeder cable entry points	4
Cable diameter	5-14mm
Number of drop cable exit points	36
Cable diameter	2-5mm

TECHNICAL SPECIFICATION - GUN

Splice Capacity		24F
Capacity	SC-SX	12F
	LC-DX	24F
Mounted Method		Wall, Pole mounted and hanging
Cable Storage		Cable storage bracket for feeder cable and drop cable
Splice Method		Shrink Splice
Cable Loaded		Cable Mid-Span
Material		PC+ABS UL-94-V0
Colour		Black
IP Rating		IP 56

SPLITTER CAPACITY

1:4 PLC Splitter	6 Pcs
1:8 PLC Splitter	3 Pcs
1:16 PLC Splitter	1 Pcs