

# OptiTap® Test Jumpers 1 F, single-mode (OS2), 2.9 mm, 3 m




**Part Number:**  
**434401E31AJ003M**

As an Industry leader in optical connectivity products, Corning designs and manufactures the OptiTap™ to SC APC Test Jumper with factory-terminated, environmentally sealed and hardened connectors to allow testing of OptiSheath® MultiPort Terminals and OptiSheath® UCAO Terminals .

## Features and Benefits

Enables direct connection to optical power meters for in-field testing

Environmentally sealed connector housing permits rapid connection to external flush-mounted bulkhead adapters on terminals or closures. Terminal or closure entry is not required for drop cable installation.

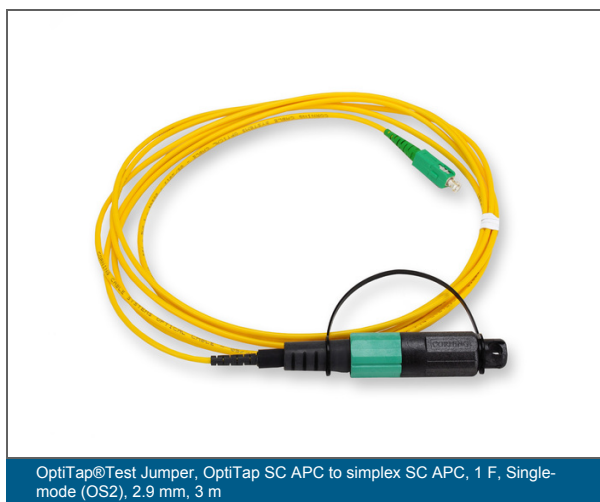

# OptiTap® Test Jumpers 1 F, single-mode (OS2), 2.9 mm, 3 m

CORNING

## Specifications

### General Specifications

Fibre category	Single-mode (OS2)
Product type	OptiTap®
Termination	Both ends
Application	Tight-buffered

### Standards

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
------	---

### Environmental Conditions

Temperature range, storage	-40 °C to 70 °C
----------------------------	-----------------

### Design

Fibre count	1
-------------	---

### Mechanical Characteristics

Cable length	3 m
Cold mate/demate	-40 °C



Corning Optical Communications GmbH & Co. KG • Lelpziger Strasse 121 • 10117 Berlin, Germany  
+00 800 2675 4641 • FAX: +49 30 5303 2335 • [www.corning.com/opcomm/emea](http://www.corning.com/opcomm/emea)

A complete listing of the trademarks of Corning Optical Communications is available at [www.corning.com/opcomm/emea/trademarks](http://www.corning.com/opcomm/emea/trademarks). Corning Optical Communications is ISO 9001 and ISO 14001 certified. © 2023 Corning Optical Communications. All rights reserved.