


TELENCO® SC39B


SUSPENSION CLAMPS FOR FIG-8 CABLE

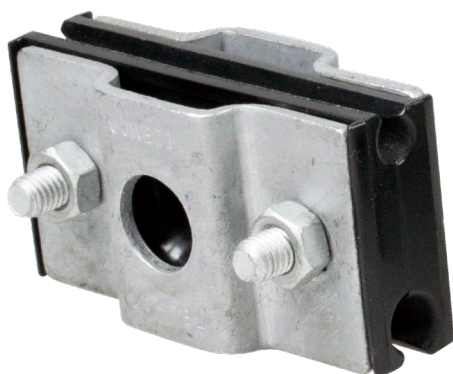

The Telenco® SC39B suspension clamp is designed to provide a **fixed** suspension for figure-8 cables with steel or dielectric insulated messenger on access networks where spans do not exceed 70m.

Its unique patented design has been developed to offer an universal hardware fitting covering all suspension cases on wooden, steel or concrete poles. With straight grooves and a reversible system, these clamps are compatible with messenger diameters from 3 to 9mm.

The Telenco® SC39B is engineered with UV resistant thermoplastic jaws reinforced with two galvanised steel plates and secured by two galvanised steel bolts.



| PN | MODEL | Ø MESSENGER | MATERIAL | | | ⚖️ | PACKG |
|------|-------|--|----------------------------|--------------------------|--------|--------|-----------|
| | | | JAWS | REINFORCING PLATES | SCREWS | | |
| 5708 | SC39B | Small groove: 3-6mm Large groove: 6-9mm | UV resistant thermoplastic | Hot-dip galvanised steel | | 0.25kg | 100 units |

FEATURES & BENEFITS

- Covers all messenger sizes from 3 to 9mm
- Straight groove enabling the suspension of stiff figure-8 cables with FRP messengers
- Acts as a fuse to avoid damage on the cable in case of abnormal vertical overload (tree, car crash ...)
- 4 kV dielectric insulation between the cable messenger and the pole/clamp



INSTALLATION

- **On a hook bolt**
The clamp can be installed with one bolt 14 x 225mm or 16 x 250mm on drillable wooden poles.
- **On a pole bracket with a hook bolt**
It can also be installed on wooden poles, round concrete poles and polygonal metallic poles with a pole banding fixing kit including: 1 pole banding 20mm or 3/4" SB207 + 1 buckle B20 + 1 plate 30/41 + 1 bolt 1/13.