


6F FIBRE DISTRIBUTION POINT

6F FDP

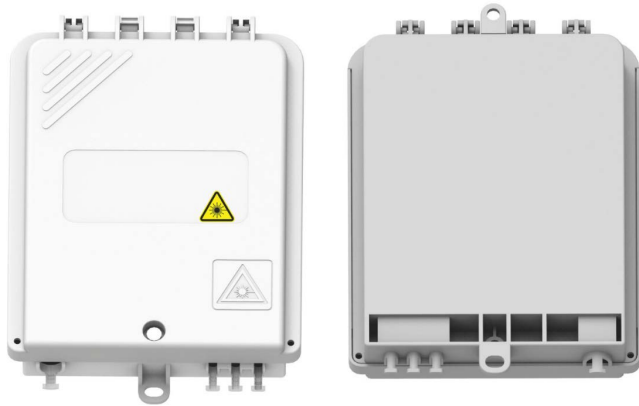

Engineered with a robust, impact-resistant housing, this FDP ensures dependable protection while maintaining flexibility for various network configurations. Its internal layout supports organised fibre routing, splice management and splitter integration, enabling quick and consistent installations.

With its space-saving design and installer-friendly access, the 6F FDP is well suited for retrofit projects and new-build developments, delivering efficient fibre management where space is limited.

SPLITTER CAPACITY

1:4 PLC Splitter	1 Pcs
1:8 PLC Splitter	1 Pcs

TECHNICAL SPECIFICATION

Splice Capacity (Splice Only)		12F
Capacity	SC-SX	3F
	LC-DX	6F
Mounted Method		Wall, Pole mounted
Material		PC+ABS UL-94-V0
Colour		Light Grey
IP Rating		IP 55
Dimension(LxWxH)		187.5*142.5*36mm
Number of feeder cable entry		3-8mm
Number of drop cable entry		6 Port(3mm)

MECHANICAL DRAWING (UNIT:MM)

