



Filoform divisible duct sealing sets for subducts have been developed to provide and effective and simple solution to all Gas and Watertight duct sealing requirements.

This modular system enables you to install it easily onto to new and existing installations. Due to the compact design the seals can be installed in all situations, even in locations with difficult access.


For use on subducts of 14mm.

PATENTED

#### **Features**

- Gas and Watertight up to 0,5 bar.
- Suitable for retrofitting.
- Easy installation.
- Slim design.
- Other versions available upon request.

## **Specifications**

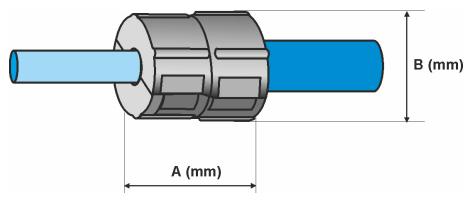

	Dimensions	A (mm)	B (mm)	Weight (gr.)
ſ	Duct seal 14mm	34	29	18


### **Material specification**

Properties	Value	
Plastic scales	glassfibre reinforced	
Cutting block	glassfibre reinforced	
Sealing plug	silicone	
Sealing	up to 0,5 bar	
Pull-out force duct seal vs duct	≥ 140N	
Mechanical compression strength	≥ 1000N, 10 sec.	

#### **More info**

#### Contents

- 2 pieces of plastic shells with click together fixings
- 1 piece cutting block
- 1 rubber seal
- Illustrated installation instructions

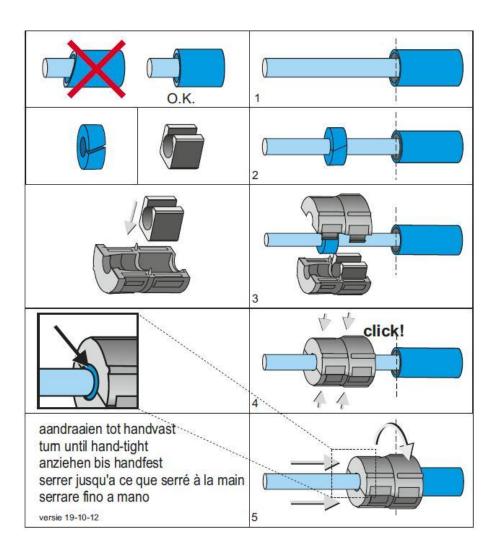

#### **Products**

Product Name	Colour	Cable Diameter (mm)	Duct outside diameter (mm)	Order unit
Duct seal 14mm / 2,5-1,5mm	purple	2,5-1,5	14	25 pcs/carton
Duct seal 14mm / 3,5-2,5mm	yellow	3,5-2,5	14	25 pcs/carton
Duct seal 14mm / 5,0-3,5 mm	green	5,0-3,5	14	25 pcs/carton
Duct seal 14mm / 6,5-5,0 mm	red	6,5-5,0	14	25 pcs/carton
Duct seal 14mm / 8,0-6,5 mm	blue	8,0-6,5	14	25 pcs/carton
Duct seal 14mm / 10,0-8,0 mm	gray	10,0-8,0	14	25 pcs/carton