


PRODUCT DATA SHEET

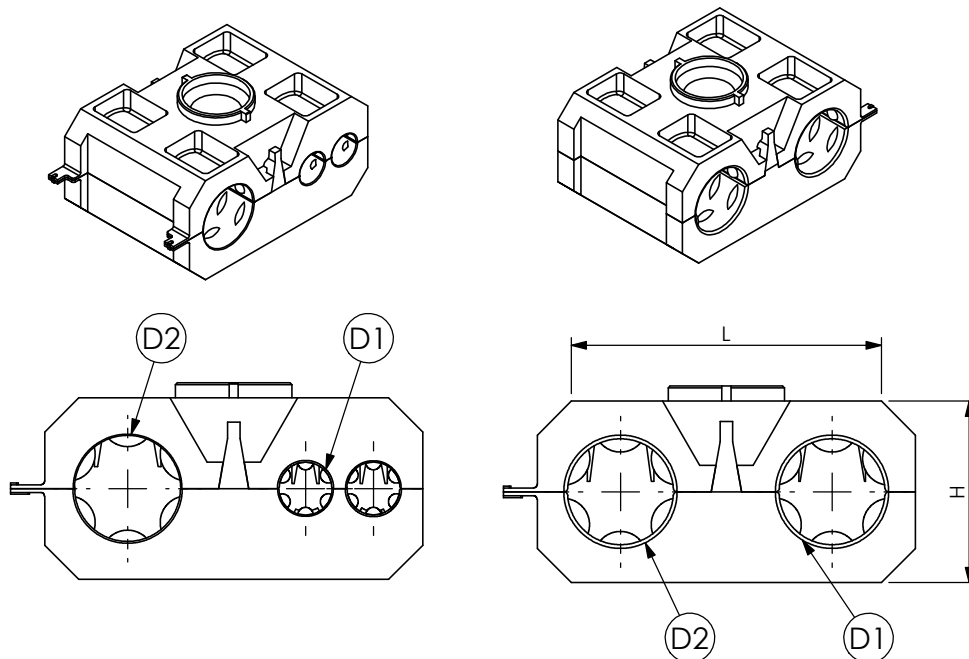

A) SPECIFICATIONS

P.A. U.V. resistant

B) RESISTANCE TESTS

Operating temperature:
-30°C + 120°C

C) PACKAGING INFORMATION

Packing in boxes.

Label indicating:

product code, article, quantity,
production batch,
FIMO logo and figure.

(Customer code on request).

D) MOUNTING INSTRUCTIONS

On request

CODE	ARTICLE	ø D1	ø D2	H	L	BAG	BOX	WEIGHT
Standard Line								
61 3307 7205	SAC 2x5	4 - 5	4 - 5	18.5	34	20	500	18
61 3307 7265	SAC 2x6,5	4.5 - 6.5	4.5 - 6.5	18.5	34	20	500	16
61 3307 7207	SAC 2x7	5 - 7	5 - 7	18.5	34	20	500	17
61 3307 7209	SAC 2x9	7 - 9	7 - 9	18.5	34	20	500	14
61 3307 7211	SAC 2x11	9 - 11	9 - 11	18.5	34	20	500	12
61 3307 2214	SAC 2x14	11 - 14	11 - 14	24	46	20	500	25
61 3307 2212	SAC 2x1/2"	14 - 17	14 - 17	24	46	20	500	19
61 3307 2220	SAC 2x20	17 - 20	17 - 20	33	58	20	500	42
61 3307 2221	SAC 2x21	19 - 21	19 - 21	33	58	20	500	37
Hybrid Saddles								
61 3307 0507	SAC 1x5+1x7	4 - 5	5 - 7	18.5	34	20	500	12
61 3307 0511	SAC 1x5+1x11	4 - 5	9 - 11	18.5	34	20	500	16
61 3307 0709	SAC 1x7+1x9	5 - 7	7 - 9	18.5	34	20	500	16
613307 0711	SAC 1x7+1x11	5 - 7	9 - 11	18.5	34	20	500	15
61 3307 0514	SAC 1x5+1x14	4 - 5	11 - 14	24	46	20	500	29
61 3307 0714	SAC 1x7+1x14	5 - 7	11 - 14	24	46	20	500	28
613307 0717	SAC 1x7+1x17	5 - 7	14 - 17	24	46	20	500	25
0633070911N1	SAC 1x9+1x11	7 - 9	9 - 11	18.5	34	20	500	15
0633072712N1	SAC 2x7+1x12	5 - 7	9 - 12	24	46	20	500	23
0633072717N1	SAC 2x7+1x17	5 - 7	14 - 17	24	46	20	500	25
61 3307 0914	SAC 1x9+1x14	7 - 9	11 - 14	24	46	20	500	27
61 3307 2714	SAC 2x7+1x14	5 - 7	11 - 14	24	46	20	500	27
61 3307 0720	SAC 1x7+1x20	5 - 7	17 - 20	33	58	20	500	54

RI	DATE	DR	DATE	AP	Description:
02					
01					
00	15/12/16	G.S.	15/12/16	A.V.	
1 ST EMISSION					



Building Sustainable Innovation

RoHS



SAC - saddles

Calibrated Double Saddles with Flexible Hinge for RF, RG and FO

FI.MO.TEC. S.p.a. reserves the right to modify the technical specifications without prior notice, according to the technical progress
Copyright FI.MO.TEC. S.p.a. All rights reserved.