
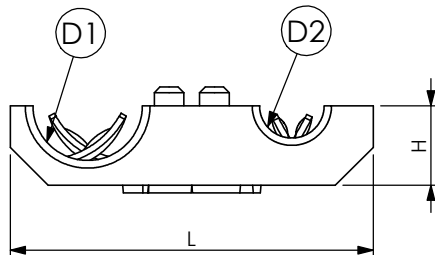
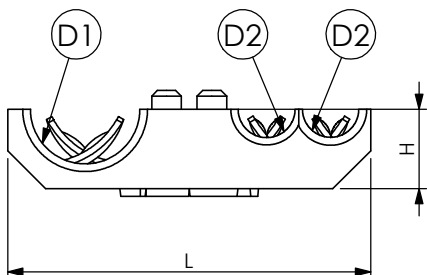
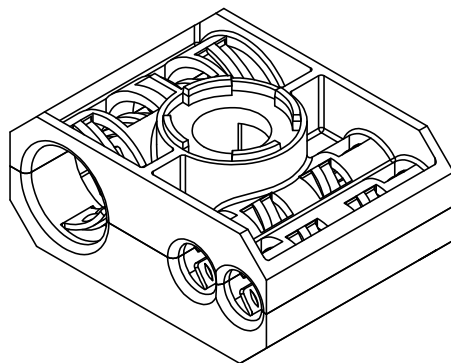


PRODUCT DATA SHEET

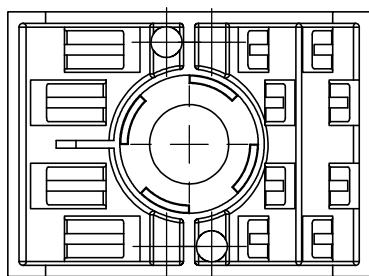

A) SPECIFICATIONS

P.A. U.V. resistant

B) RESISTANCE TESTS

Operating temperature:
-30°C + 120°C

C) PACKAGING INFORMATION

Packing in boxes.
Label indicating:
product code, article, quantity,
production batch,
FIMO logo and figure.
(Customer code on request).

D) MOUNTING INSTRUCTIONS

On request

CODE	ARTICLE	ø D1	ø D2	H (mm)	L (mm)	BAG	BOX	WEIGHT
61 3303 0207	SEC 2x7	4 - 7		10,5	40	20	100	10
61 3303 0209	SEC 2x9	6 - 9		10,5	40	20	100	9,8
61 3303 0211	SEC 2x11	8 - 11		10,5	40	20	100	9
61 3303 0214	SEC 2x14	9 - 14		10,5	48	20	100	11,8
61 3303 0219	SEC 2x19	14 - 19		13	57	20	100	15,4
61 3303 0224	SEC 2x24	19 - 24		16	67	20	100	19,8
61 3303 0709	SEC 1x9+1x7	6 - 9	4 - 7	10,5	40	20	100	9,8
61 3303 0711	SEC 1x11+1x7	8 - 11	4 - 7	10,5	40	20	100	9
61 3303 0814	SEC 1x14+1x8	9 - 14	5 - 8	10,5	48	20	100	12
61 3303 2714	SEC 1x14+2x7	9 - 14	4 - 7	10,5	48	20	100	11,6
61 3303 1014	SEC 1x14+1x10	9 - 14	7 - 10	10,5	48	20	100	11,6
61 3303 0819	SEC 1x19+1x8	14 - 19	5 - 8	13	57	20	100	15,8
61 3303 2719	SEC 1x19 +2x7	14 - 19	4 - 7	13	57	20	100	15,8
61 3303 0824	SEC 1x24+1x8	19 - 24	5 - 8	16	67	20	100	20

RI	DATE	DR	DATE	AP	Description: SEC - saddles Double Saddles for a Wide Range of Cable's Diameter
02					
01					
00	15/12/16	G.S.	15/12/16	A.V.	
1 ST EMISSION					
					