

LISCA

LIS-C12-11431X-11431X-XXXXX-52


Cable: SUCOFEED_1/2" (annular)

Connectors: 2x straight male 4.3-10-X (HEX. nut)

Description

LISCA Assembly consisting of corrugated 1/2" flexible annular coaxial cable with connectors 2x straight 4310(X) male for frequencies DC to 6 GHz.
(LISCA = Low Loss Soldered Corrugated Cable Assemblies)

Mechanical Diagram

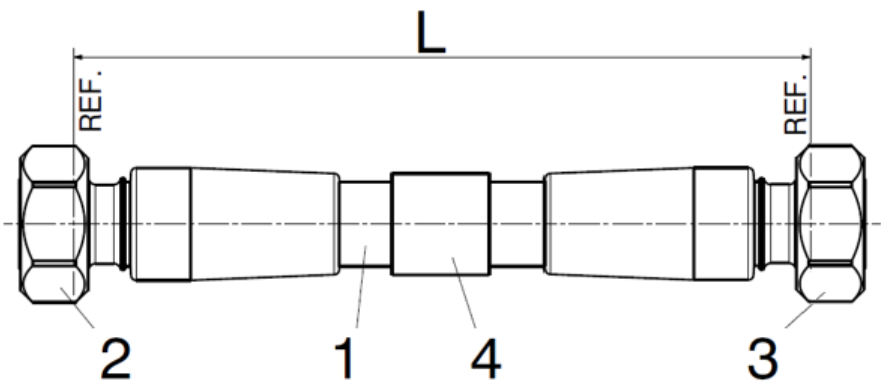

List of Components

Pos	Components	Description	Type
1	Cable type	Corrugated 1/2" flex annular with PE jacket	SUCOFEED_1/2" or equivalent
2	Connector type	4310(X) straight male	LIS11_431X-50-12-STD
3	Connector type	4310(X) straight male	LIS11_431X-50-12-STD
4	Marking	See Marking and Packing section	

Ordering Information

LIS-C12-11431X-11431X-XXXXX-52

XXXXX = Length of assembly in millimetres

Example: LIS-C12-11431X-11431X-02000-52

Jumper cable made with 2x straight male 4310(X) connectors using 1/2" annular corrugated cable with length 2000 millimetres (6.5 ft).

LIS-C12-11431X-11431X-XXXXX-52

Cable: SUCOFEED_1/2" (annular)

Connectors: 2x straight male 4.3-10-X (HEX. nut)

Electrical Data

Property	Description	Value											
Impedance		50 Ω											
Frequency	max. operating	6 GHz											
Return loss 100% tested	Length	0.5m to 5m				5m to 8m				8m to 12m			
	DC - 1.00 GHz	≥ 29 dB (typical 32 dB)				≥ 27 dB (typical 31 dB)				≥ 26 dB (typical 30 dB)			
	1.70 - 2.20 GHz	≥ 27 dB (typical 30 dB)				≥ 25 dB (typical 29 dB)				≥ 24 dB (typical 28 dB)			
	2.20 - 2.70 GHz	≥ 25 dB (typical 28 dB)				≥ 23 dB (typical 27 dB)				≥ 22 dB (typical 26 dB)			
	3.40 - 3.80 GHz	≥ 22 dB (typical 25 dB)				≥ 21 dB (typical 24 dB)				≥ 20 dB (typical 23 dB)			
Intermodulation 100% tested	IM3 (2x20W)	≤ -160 dBc / typical: -163 dBc / at 1.8 GHz or alternative at 0.9 GHz											
RF power	40°C (sea level)	1 GHz: ≥ 1000 W / 2.2 GHz: ≥ 700 W / 2.7 GHz: ≥ 550 W / 3.8 GHz: ≥ 480 W											
Max. Attenuation 100% tested [dB at 20°C]	Length	1.0m	2.0m	3.0m	4.0m	5.0m	6.0m	7.0m	8.0m	9.0m	10m	12m	
	DC ÷ 1.0 GHz	0.13	0.22	0.32	0.41	0.50	0.59	0.68	0.77	0.87	0.96	1.14	
	up to 2.2 GHz	0.18	0.32	0.46	0.60	0.75	0.89	1.03	1.17	1.31	1.45	1.73	
	up to 2.7 GHz	0.20	0.36	0.51	0.67	0.83	0.99	1.15	1.30	1.46	1.62	1.94	
	up to 3.8 GHz	0.23	0.42	0.62	0.81	1.00	1.19	1.38	1.57	1.77	1.96	2.34	

Mechanical Data

Property	Description	Value
Cable length tolerance	Length is measured from the outer conductor interfaces of straight connectors	for cable up to 2m: +/-10mm for cable up to 5m: +/-30mm for cable > 5m: +/- 1 % of Length
Coupling nut torque	4.3-10(X) male connector (recommended)	5 ... 8 Nm
Bending radius	Single // Repeated (20 times)	min. 70 mm // min. 125 mm
	Cable bending must start after the moulded connector cable entry protection!	
Hanger spacing	Recommended distance	0.8 m

Environmental Data

Property	Description	Value
Temperature range	Operating // Installation Storage	-40° C to +85° C // -25° C to +60° C -70° C to +85° C
Waterproof rate	0.1 bar, 24 h, 20°C	IP68
RoHS (2011/65/EU)	Lead free solder	Compliant

LIS-C12-11431X-11431X-XXXXX-52

Cable: SUCOFEED_1/2" (annular)

Connectors: 2x straight male 4.3-10-X (HEX. nut)

Requirement of included components**4.3-10(X) straight male connector (HEX. nut)**

Parameter	Value
Interface	Meet std. IEC 61169-54
Coupling nut	HEX. 22 mm
Material	Body, nut and centre contact: Brass Insulator: PTFE
Plating	Body: Silver or Tremetal Centre contact: Silver Nut: Nickel or Tremetal

Corrugated 1/2" Annular cable

Parameter	Condition	Value
Jacket	PE, black	Max. Φ 16.3 mm
	Free of halogen	IEC 60754-1
	UV resistance	DIN EN ISO 4892

Marking and Packing

Marking	Description
Positioning	If cable $\leq$ 1m: in cable centre // If cable > 1m: 20 cm from moulding of connector (No. 2)
Printing	Manufacturer's trade name/mark // PO or Batch no. // Product description
Packing	1 Assembly in a plastic bag, with protection on connector interface

WAIVER!

It is exclusively in written agreements that we provide our customer with warrants and representations as to the technical contained specifications and/or the fitness for any particular purpose. The facts and figures herein are carefully complied to the best of our knowledge, but they are intended for general informational purposes only.

HUBER+SUHNER is certified according to ISO 9001 and ISO 14001

Issued: 23/03/2023

Revision: B

uncontrolled copy**HUBER+SUHNER**

www.hubersuhner.com