


MECHANICAL JOINT CLOSURE CAP ENDED

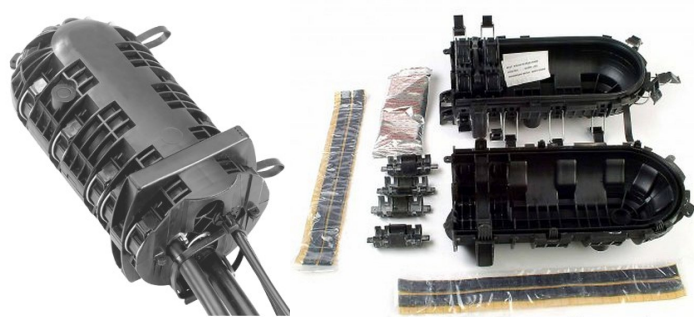

Re-usable mechanical splice closure for aerial, underground and direct buried splices in the unpressurised copper telecommunications network. The mechanical strength from the robust construction protects fibre cables enclosed within.

FEATURES & BENEFITS

Easy to handle at all temperatures
Easy to re-enter
No special tools are required for installation or re-entry
Proven gel sealing
An innovative cable fixation system
Flexible branding plug system

SPECIFICATIONS

Application	For use with Polyethylene cables
Cable Capacity, maximum	2
Cable Sealing Type	Gel filled
Closure Style	Single-ended
Colour	Black
Splicing Capacity, maximum	10

DIEMENSIONS

Length	185 mm (7.283 in)
Single Cable Diameter, maximum	28 mm (1.102 in)
Single Cable Diameter, minimum	7 mm (0.276 in)
Splice Bundle Diameter, maximum	50 mm (1.969 in)

PACKAGING AND WEIGHTS

Packaging quantity	1
Packaging Type	Bag Carton