

Microduct Connector Reducer Clear 7/5




All straight connectors, end-stop connectors and reducing straight connectors are made with plastic materials compatible with substances present in the ground.

The connectors' robust design includes **IP68 protection** against water infiltration and resistance to high-pressure forces, allowing them to be used in **underground cable (DB) installation**.

PN	MODEL	PACKG
W2502-07	Microduct Connector Reducer Clear 7/5	1

FEATURES

- No tools needed
- A transparent body allows verification of the position of the microduct and population of the fibre
- Maximum installation pressure: 30 bar
- Fluid: Compressed air with a blowing system
- Microduct to connect: Polyethylene HDPE
- Year esteemed of life: 25 years

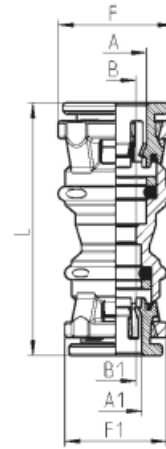

DIMENSIONS									
Mod.	A	A1	B	B1	F	F1	L	Weight (g)	Package (pieces)
CV4582 5/3,5-3/2,1	5	3	3,5	2,1	16,5	10	35	4	100
CV4582 7-5/3,5	7	5	3,5	3,5	16,5	12,5	40	4,5	100
CV4582 10-7/5,5	10	7	5,5	5,5	20,5	16,5	44,5	6	100
CV4582 10/5,5-8/5	10	8	5,5	5	20,5	17,5	45,5	5	100
CV4582 12-10/8	12	10	8	8	23	20,5	50	10	100
CV4582 14-12/10	14	12	10	10	25,5	23	55,5	14	100
CV4582 16/12-14/10	16	12	14	10	25,5	23	55,5	15	50