


SINGLE SHEATH CORRIDOR CABLE

- G.657B3 4-12FO, PRECONNECTORIZED SC/APC



LEGEND	
1	Fibre
2	Outer sheath
3	Aramid yarn

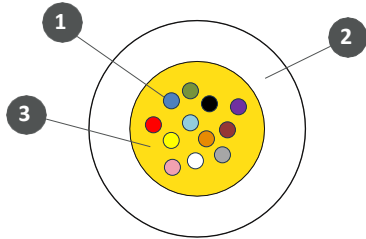

The Telenco® single sheathed corridor cable is a suitable solution enabling simple, fast and reliable install in an Multi Dwelling Units.

Thanks to its FR-LSZH outer sheath and water blocking aramid yarns, this solution can be suitable for both indoor and outdoor applications

FEATURES & BENEFITS

- Enables simple, fast and reliable outdoor and indoor installation
- Compliant with CPR Cca
- Small sized, low bending loss

CABLE CONSTRUCTION

Optical fibre	Compliant with G.657B3 ITU recommendations
Fibre count	4,8 and 12FO
Fibre colour code	1.Blue, 2.Orange, 3.Green, 4.Red, 5.Grey, 6.Yellow, 7.Brown, 8.Violet, 9.Black, 10.White, 11.Pink, 12.Turquoise
Strength member	Aramid yarns
Outer sheath	Material: FR LSZH Color: White Diameter: 2.0 +/-0.1mm
Weight	Approx. 3.5 kg/km
Cable marking	<p> TEL - WW/YY – COF207 CORRIDOR CABLE xFO G.657B3 Cca s1b – d1 – a2 - XXXXXX m</p> <p>WW/YY: Week / Year xFO : Number of fibres</p> <p> : Laser pictogram and Telephone pictogram XXXXXXm: Incremental produced length of one type of cable Ink color: Black or White</p>

MECHANICAL AND ENVIRONMENTAL PERFORMANCES

Characteristics	Standards	Values
Maximum Allowable Tension	IEC 60794-1-2 - Method 1	Long term 35N, Short term 75N
Min. Bend radius	IEC 60794-1-2 - Method 11	Dynamic 30D, Static 15D
Crush	IEC 60794-1-2-- Method 3	Long term 80N/10cm, Short term 150N/10cm
Temperature Cycling	IEC 60794-1-2 -- Method F1	Installation : -10°C + 65°C Operation : -40°C + 70°C Storage : -40°C + 70°C
Fire behaviour	EN 50575	CPR B2ca

FIBRE CHARACTERISTICS

GEOMETRICAL PROPERTIES	
Cladding diameter	125µm ± 0.7µm
Cladding non circularity	≤0.7%
Core Cladding Concentricity Error	≤0.5µm
Coating diameter	235µm - 245µm
Coating-Cladding Concentricity Error	≤12µm
Tensile proof test	≥100kpsi

MODE FIELD DIAMETER	
at 1310 nm	8.2 - 9.0µm
at 1550 nm (typical)	9.1 - 10.1µm

MACROBENDING ATTENUATION		
Deployment Condition	1550nm	1625nm
Wavelength Induced Attenuation		
1 turn on a 10mm radius mandrel	≤0.03dB	≤0.10dB
1 turn on a 7.5mm radius mandrel	≤0.08dB	≤0.25dB
1 turn on a 5mm radius mandrel	≤0.15dB	≤0.45dB


WAVELENGTH (nm)	CABLED MAX ATTENUATION (dB/km)
1310	≤0.35
1550	≤0.21
1625	≤0.23

CHROMATIC DISPERSION	
Zero Dispersion Wavelength (λ ₀)	1302-1324nm
Zero Dispersion Slope (S ₀)	≤0.092ps/nm ² .km
Cut-off Wavelength (λ _{CC})	≤1260nm

POLARIZATION MODE DISPERSION (PMD)*	
Fibre PMD Link Design Value	<0.06ps/√km
Maximum Individual Fibre	<0.1ps/√km

(* according IEC 60794-3, method 1, m=20, Q=0.01%)

CONNECTORIZATION

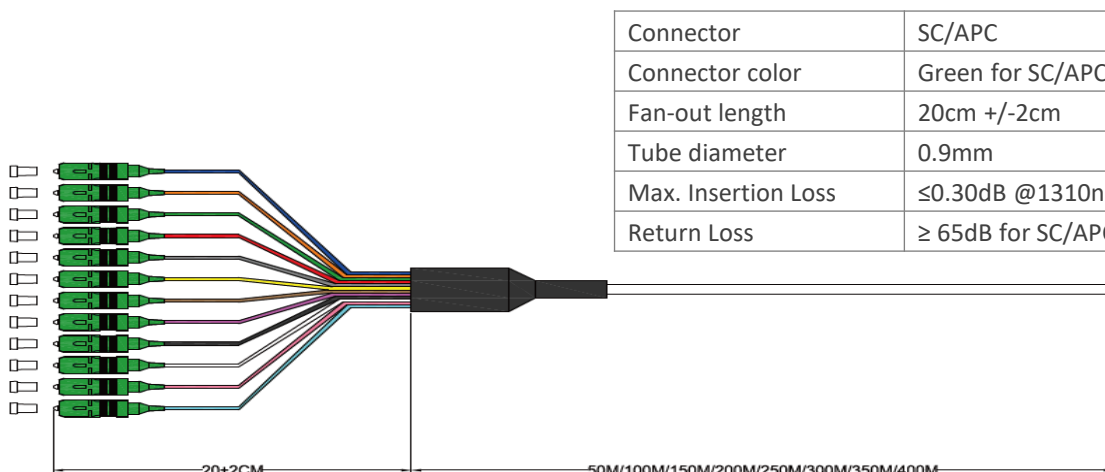

Connector	SC/APC
Connector color	Green for SC/APC
Fan-out length	20cm +/-2cm
Tube diameter	0.9mm
Max. Insertion Loss	≤0.30dB @1310nm/1550nm
Return Loss	≥ 65dB for SC/APC