

19" RACK CABINET 42U 800X800

RACK CABINETS



Non-contractual photo

19" floor-standing rack cabinet, 42U, 800 x 800 mm, rated for an 800 kg load. Supplied in black, RAL 9005, with IP20 protection as standard and 4 x 19" mounting uprights. Fitted with a lockable glazed front door and a lockable solid rear door, side panels that lock via clips and a key, four adjustable levelling feet, and a screw and earthing kit. 19" mounting rails adjust to the required depth in 25 mm increments.

- **Dimensions (L x D x H):** 800 x 800 x 1984 mm
- **Load Capacity:** 800 kg
- **Colour:** Black, RAL 9005

FEATURES & BENEFITS

- IP20 protection as standard
- 4 x 19" uprights
- Side panels lock via clips and a key lock
- 4 levelling feet to adjust height
- Screw kit and earthing kit included

TECHNICAL SPECIFICATION

Unit	42U
Width	800 mm
Depth	800 mm
Max. usable depth	669 mm
Dimensions (L x D x H)	800 x 800 x 1984 mm
Load Capacity	800 kg
Colour	Black, RAL 9005

DOORS


- Front door: glazed, lockable
- Rear door: solid, lockable

OPTIONS


- Fan trays (2 fans for 600mm width, 4 for 800/1000mm)
- Wheel kit: set of 4 castors, 2 with brakes — Ref. 8062037

CODE	UNIT	WIDTH	DEPTH	DIMENSIONS	LOAD	COLOUR
8062079	42U	800mm	800mm	800x800x1984mm	800kg	Black RAL9005


TECHNICAL DRAWING

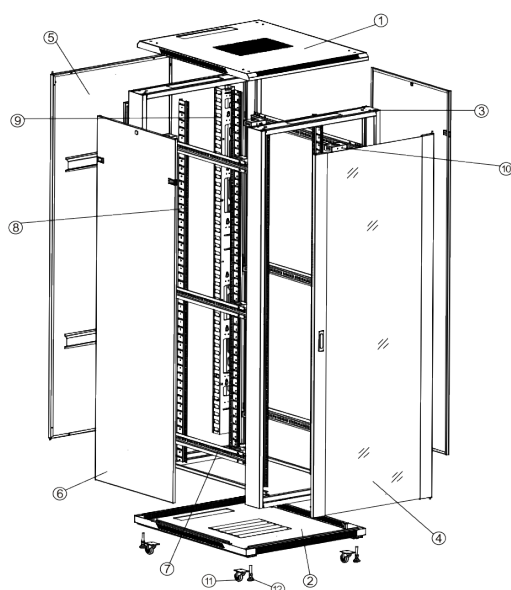

- 1 1 top cover
- 2 1 base plate
- 3 2 door frames
- 4 1 front door
- 5 1 rear door
- 6 2 side panels
- 7 6 horizontal cross-members
- 8 4 x 19" uprights
- 9 2 vertical cable channels
- 10 12 mounting brackets
- 11 4 castors (2 with brakes) – Option
- 12 4 adjustable feet

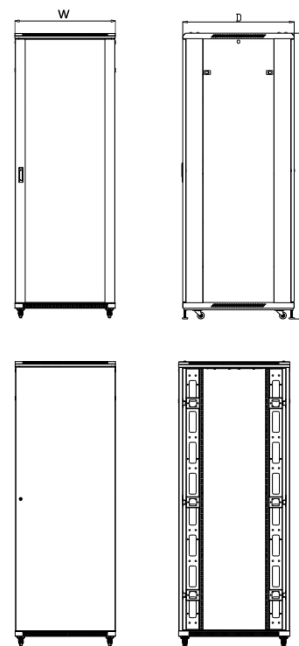

Front / side / rear / side (no panel) views

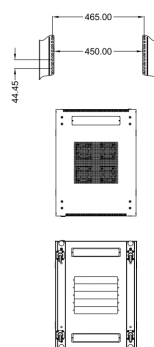

Top / bottom mounting views (dimensions in mm)

KEY FEATURES



Adjustable mounting support
Easy adjustment of the 19" uprights. Quick and practical — position them to the required depth in 25 mm increments.



Enhanced security
High security assured by an advanced locking system on the doors.



Easy-to-assemble structure
Saves time during installation.



Optional fans
Fan panels available: 2 fans for 600 mm width, 4 fans for 800/1000 mm width.



Panel locking
Side panels lock easily using clips and a key lock.



Mobility
4 adjustable feet, height adjustable. Castors optional — set of 4 (2 with brakes), Ref. 8062037.

SCREW & EARTHING KIT

Screw kit: one cage nut, one black plastic washer, one screw — per kit.

Unit (U)	Screw Kits
≤ 27U	20 kits
> 27U, ≤ 37U	30 kits
> 37U, ≤ 47U	40 kits

DOOR TYPES



Ventilated glazed door



Glazed door



Solid door



Perforated door



Double perforated door