


TELENCO® POLE HEAD BOLT FOR POLE HARDWARE & POLE STRUT INSTALLATION

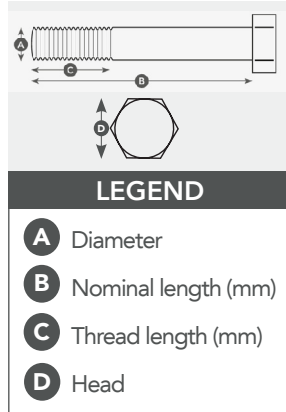

Telenco® pole head bolts enable the installation of pole hardware on drillable or pre-drilled poles. Depending on their length, they can also be used for creating a pole strut. In this precise case, two additional plates are required.

PN	DESIGNATION	DIMENSIONS (mm)				PLATE(S)	NUT(S)	🏋️	PACKG
		Ø BOLT A	NOMINAL LENGTH B	THREAD LENGTH C	HEAD D				
91956	BH 14x225/145	14	225	145	21	1 flat: 70x35x5mm	1	0.36kg	50
2280	BH 14x280/180	14	280	180	21	2 flat: 50x50x5mm	2	0.37kg	50
2108	BH 14x300/200	14	300	200	21	1 flat: 50x50x5mm	1	0.38kg	25
91957	BH 14x350/180	14	350	180	21	2 curved: 70x35x5mm	1	0.6kg	20
91958	BH 14x450/280	14	450	280	21	2 curved: 70x35x5mm	1	0.76kg	20
0101	BH 16x250/100	16	250	100	24	2 flat: 75x50x5mm and 50x50x5mm	1	0.67kg	25
0103	BH 16x300/140	16	300	140	24	2 flat: 75x50x5mm and 50x50x5mm	1	0.76kg	25
2364	BH 16x300/140	16	300	140	24	1 flat: 50x50x5mm	1	0.87kg	25
0105	BH 16x350/100	16	350	100	24	2 flat: 75x50x5mm and 50x50x5mm	1	0.98kg	25
2365	BH 16x350/100	16	350	100	24	1 flat: 50x50x5mm	1	0.64kg	25

TECHNICAL CHARACTERISTICS

- Material: hot-dip galvanised steel, compliant with ISO10684 and ISO1461

FEATURES & BENEFITS

- For pole line hardware fastening or creating a pole strut
- Various available models to meet most of the use cases