

19" RACK CABINET 27U 600X800

RACK CABINETS



Non-contractual photo

19" floor-standing rack cabinet, 27U, 600 x 800 mm, rated for an 800 kg load. Supplied in black, RAL 9005, with IP20 protection as standard. Fitted with a lockable glazed front door and a lockable solid rear door, two removable, lockable side panels, four adjustable levelling feet, and a screw and earthing kit. 19" mounting rails adjust to the required depth in 25 mm increments.

- **Dimensions (L x D x H):** 600 x 800 x 1317 mm
- **Load Capacity:** 800 kg
- **Colour:** Black, RAL 9005

FEATURES & BENEFITS

- IP20 protection as standard
- Set of 2 removable side panels, lockable
- Supplied with 4 levelling feet to adjust height
- Screw kit and earthing kit included

TECHNICAL SPECIFICATION

Unit	27U
Width	600 mm
Depth	800 mm
Max. usable depth	669 mm
Dimensions (L x D x H)	600 x 800 x 1317 mm
Load Capacity	800 kg
Colour	Black, RAL 9005

DOORS

- Front door: glazed, lockable
- Rear door: solid, lockable

OPTIONS


- Fan trays (2 fans for 600mm width, 4 for 800/1000mm)
- Wheel kit: set of 4 castors, 2 with brakes — Ref. 8062037

CODE	UNIT	WIDTH	DEPTH	DIMENSIONS	LOAD	COLOUR
8062036	27U	600mm	800mm	600x800x1317mm	800kg	Black RAL9005


19" RACK CABINET 27U 600X800

RACK CABINETS


TECHNICAL DRAWING

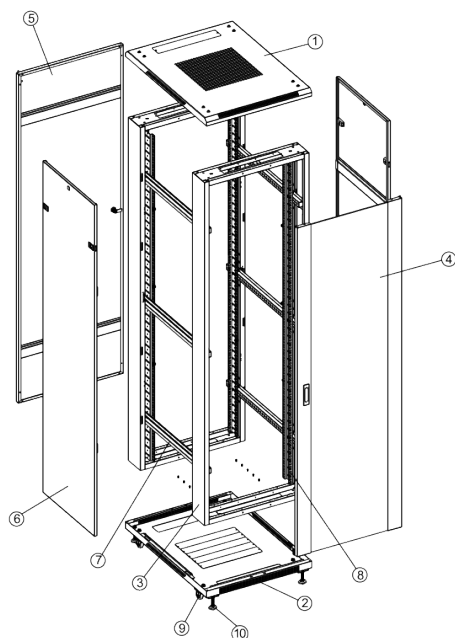

- 1 1 top cover
- 2 1 base plate
- 3 2 door frames
- 4 1 front door
- 5 1 rear door
- 6 2 side panels
- 7 6 horizontal cross-members
- 8 4 x 19" uprights
- 9 4 castors (2 with brakes) – Option
- 10 4 adjustable feet

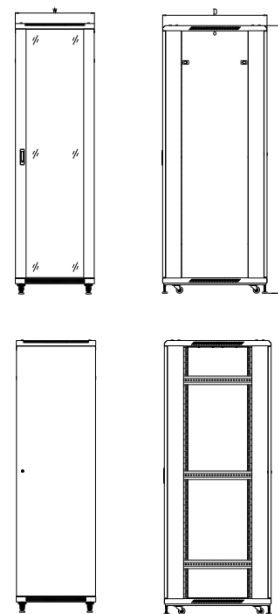

Front / side / rear / side (no panel) views

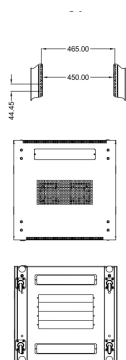

Top / bottom mounting views (dimensions in mm)

19" RACK CABINET 27U 600X800

RACK CABINETS

KEY FEATURES


Adjustable mounting support

Easy adjustment of the 19" uprights. Quick and practical – position them to the required depth in 25 mm increments.


Enhanced security

High security assured by an advanced locking system on the doors.


Easy-to-assemble structure

Saves time during installation.


Optional fans

Fan panels available: 2 fans for 600 mm width, 4 fans for 800/1000 mm width.


Panel locking

Side panels lock easily using clips and a key lock.


Mobility

4 adjustable feet, height adjustable. Castors optional – set of 4 (2 with brakes), Ref. 8062037.

SCREW & EARTHING KIT

Screw kit: one cage nut, one black plastic washer, one screw – per kit.

Unit (U)	Screw Kits
≤ 27U	20 kits
> 27U, ≤ 37U	30 kits
> 37U, ≤ 47U	40 kits

DOOR TYPES



Ventilated glazed door



Glazed door



Solid door



Perforated door



Double perforated door