


64F FIBRE DISTRIBUTION POINT

64F FDP

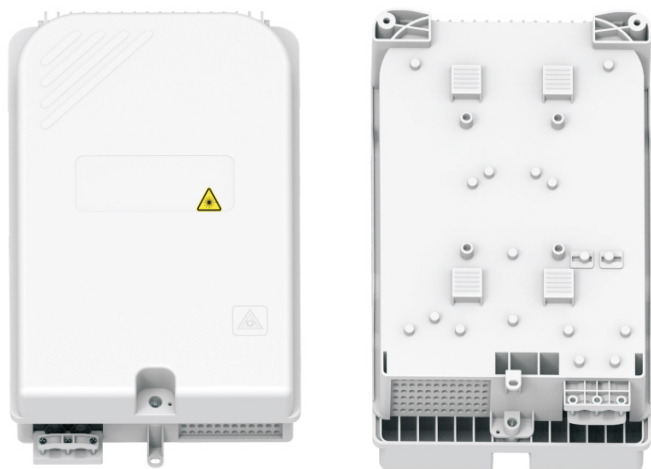

The 64F Fibre Distribution Point (FDP) is a compact, high-capacity enclosure designed for FTTH networks, supporting up to 64 fibres or 144 splices. Suitable for wall or pole mounting, it enables mid-span cable access, flexible PLC splitter configurations, and organised cable management. Manufactured from PC+ABS UL 94-V0 and rated to IP55, it provides reliable protection and straightforward installation in outdoor environments.

SPLITTER CAPACITY

1:4 PLC Splitter	12 Pcs
1:8 PLC Splitter	8 Pcs
1:16 PLC Splitter	4 Pcs
1:32 PLC Splitter	2 Pcs

TECHNICAL SPECIFICATION

Splice Capacity (Splice Only)		144F
Capacity	SC-SX	32F
	LC-DX	64F
Mounted Method		Wall, Pole mounted
Cable Storage		Cable Storage Bracket for Feeder Cable and Drop Cable
Splice Method		Shrink Splice or Crimp Splice
Cable Loaded		Cable Mid-Span
Material		PC+ABS UL-94-V0
Colour		Light Grey
IP Rating		IP 55
Dimension(LxWxH)		428.5*274*126.5mm
Number of feeder cable entry		4 Port(7-18mm)
Number of drop cable entry		72 Port(3-5mm)

MECHANICAL DRAWING (UNIT:MM)

