



EXT FACADE BREAKOUT BOX GREY

Outdoor external Point Of Entry box 4 FO

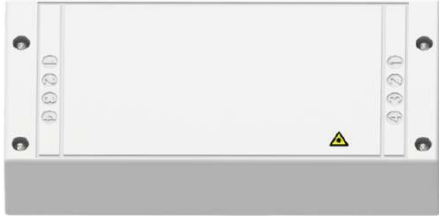


Installed externally near the building façade, the Outdoor Point of Entry Box provides the transition between the building’s external feeder cable and the fibre cable leading into the property. It allows the connection of the customer’s Optical Network Terminal (ONT) to the Fibre to the Home (FTTH) network. With its weather-resistant, compact, and discreet design, the box minimises visual impact while ensuring durability in outdoor environments.

 Dimensions: L 216.40 x H 98.40 x D 48 mm


FEATURES & BENEFITS

- Reliable transition from building corridor cable to fibre optic connection at customer premises
- Cable entry and exit on both sides of the box for flexible fibre distribution
- 2 m of 3.0 mm cable storage capacity
- Supports up to 4 SC/APC optical adapters and 12 fusion splices
- Bending radius protection to prevent cable damage
- Reduced overall thickness for compact installation
- Easy, tool-free access for installation and maintenance
- Space for customer branding and warning/starburst label on the cover

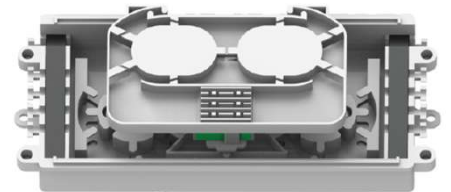

TECHNICAL SPECIFICATION

- Box dimensions: L 216.40 mm x H 98.40 mm x D 48 mm
- Splice capacity: 12F
- Optical connectors: 4 SC-SX / 4 LC-SX
- Optical Fibre compliant with ITU G.657A2 & B3
- Bend radius: ≥ 15 mm (A2) & ≥ 5 mm (B3)
- IP Rating: 65
- Input Ports (both side): 3-8 mm
- Output Ports (both side): 3-5 mm
- Box color: Grey
- Material: ABS/PC
- Cable Storage Capacity: 2m of 3.0mm cable

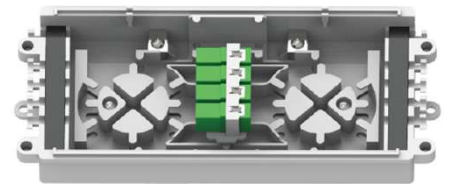

PRODUCT RANGE

CODE	MODEL	PACKAGING	QTY PER PALLET
9999999	Outdoor External POE 4F with 4 SC/APC adapters	45 pcs	900 pcs