


eline® FB REEL 4-8-12 FO

FLOOR BOX REEL WITH PRE-CONNECTORIZED CABLE

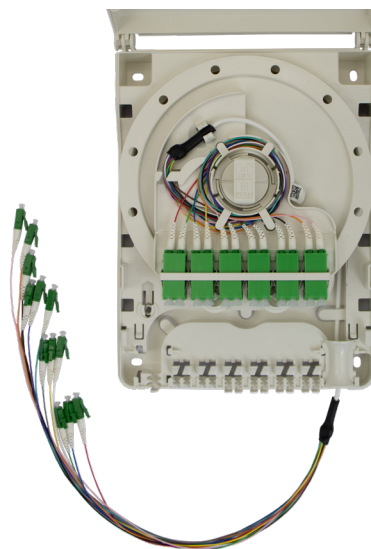


Full pre-connectorized solution for deployment from the floor to the Building Entry Point.

BENEFITS

- Easy and intuitive installation
- Cable storage capacity inside the floor box 20m
- Up to 12 LC/APC connections
- Bend radius fully protected. No risk during pulling operation
- The reel is blocked when the cover is closed to avoid accidental extraction
- Secured closing



Delivered in "pizza box" for length >20m for an easy unwinding

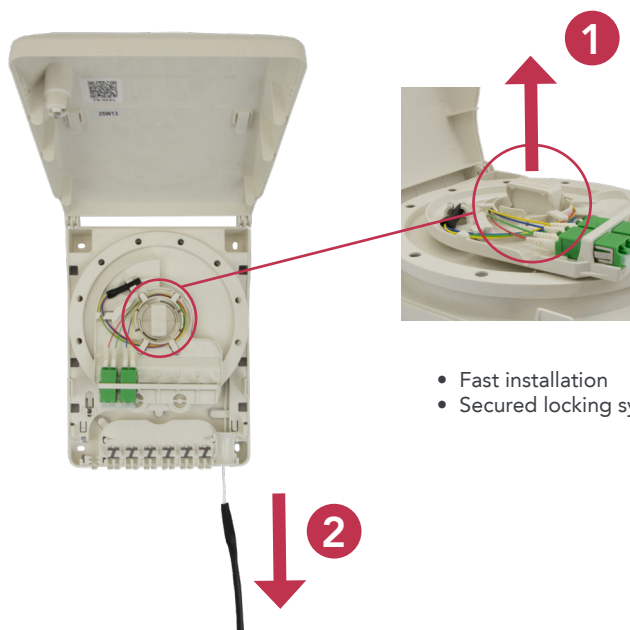

- Fast installation
- Secured locking system to adjust the length to deploy

FB REEL CHARACTERISTICS



Floor box dimensions	225 x 160 x 50mm
Capacity cable diameter 2,8mm within the floor box	20m
Material - Colour	ABS/PC - White RAL 9010
Material of base plate & spool	ABS/PC recycled - White
Operating temperature	-10°C to +60°C
Impact resistance	IK07
Ingress protection	IP40
Fire safety for the box	UL94-V0
Fire safety for cable	CPR B2ca, s1, a1, d1
Fibre specification	ITU-T G657-A2
Optical Connector	LC/APC
Optical performances IL - RL	Grade B - RL ≥ 55dB
Adaptor	LC/APC Dulpex with transparent caps
Cable Input	By bottom side, right or left position
Connectorized LC/APC output for customer connections	By bottom side

CARDBOARD REEL CHARACTERISTICS FOR ADDITIONAL LENGTH

Dimensions of external packaging ("pizza box")	350 x 340 x 75mm
Additional cable length	+40m (=> total length 60m)

KEY FEATURES

Compact dimensions	
Spool lock system: button at the middle of the spool with 12 lock positions - Unlosable system	<div></div> <div><div>Locked position</div><div>Opened position</div></div>
The open cover snaps into a locking position at 100° with a comfortable space to work. Not necessary to remove it even if it is possible	
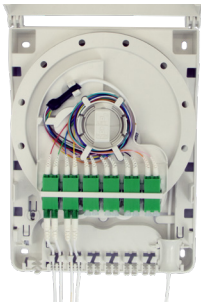
<p>Customer connections easy and protected. Orientation of the adaptor plate independent from the locking position of the reel, simply by means of releasing and rotating of the adaptor-plate</p>	
<p>Delivered with cardboard reel in pizza box for length ≥ 20m</p>	

PRODUCT CONFIGURATIONS

RÉF.	DESCRIPTION	PACKAGING	QTY/PALLET
1008830	FB Reel Cable 2.3mm B2ca 4FO LC/APC-LC/APC 20m	1 pc	360
1008831	FB Reel Cable 2.3mm B2ca 4FO LC/APC-LC/APC Kit-40m		90
1008832	FB Reel Cable 2.3mm B2ca 4FO LC/APC-LC/APC Kit-60m		90
1008833	FB Reel Cable 2.8mm B2ca 8FO LC/APC-LC/APC 20m		360
1008834	FB Reel Cable 2.8mm B2ca 8FO LC/APC-LC/APC Kit-40m		90
1008835	FB Reel Cable 2.8mm B2ca 8FO LC/APC-LC/APC Kit-60m		90
1008836	FB Reel Cable 2.8mm B2ca 12FO LC/APC-LC/APC 20m		360
1008837	FB Reel Cable 2.8mm B2ca 12FO LC/APC-LC/APC Kit-40m		90
1008838	FB Reel Cable 2.8mm B2ca 12FO LC/APC-LC/APC Kit-60m		90